





## Surface Mount Schottky Rectifier

### Features

- Low profile package
- Ideal for automated placement
- Guardring for overvoltage protection
- Low power losses, high efficiency
- High forward surge capability
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C

### DO-214AC (SMA)

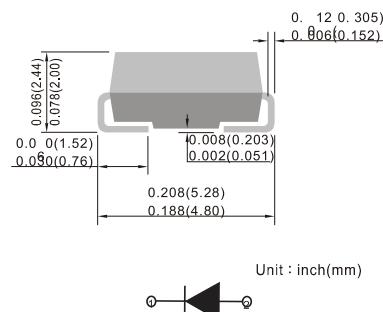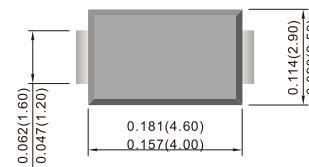

Unit : inch(mm)  
Cathode Anode

### Typical Applications

For use in low voltage high frequency inverters, freewheeling, DC/DC converters, and polarity protection applications.

### Mechanical Data

- **Package:** DO-214AC (SMA)  
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, halogen-free
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** Cathode line denotes the cathode end

### ■Maximum Ratings ( $T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	SS12A	SS13A	SS14A	SS15A	SS16A	SS18A	SS110A	SS115A	SS120A
Repetitive peak reverse voltage	$V_{RRM}$	V	20	30	40	50	60	80	100	150	200
Average rectified output current @60Hz sine wave, resistance load, TL (FIG.1)	$I_o$	A						1.0			
Surge(non-repetitive)forward current @60Hz half-sine wave,1 cycle, $T_a=25^\circ\text{C}$	$I_{FSM}$	A						30			
Storage temperature	$T_{stg}$	°C						-55 ~+150			
Junction temperature	$T_j$	°C					-55 ~+150		-55 ~+175		

### ■Electrical Characteristics ( $T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	SS								
				12A	13A	14A	15A	16A	18A	110A	115A	120A
Maximum instantaneous forward voltage drop per diode	$V_F$	V	$I_{FM}=1.0\text{A}$		0.55		0.70		0.85		0.95	
Maximum DC reverse current at rated DC blocking voltage per diode@ $V_{RM}=V_{RRM}$	$I_{RRM}$	mA	Ta=25°C		0.50				0.10			
			Ta=100°C		10				5.0			

### ■Thermal Characteristics ( $T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	SS								
			12A	13A	14A	15A	16A	18A	110A	115A	120A
Thermal resistance	$R_{\theta J-A}$	°C/W						65 <sup>1)</sup>			
	$R_{\theta J-L}$							20 <sup>1)</sup>			

Note

(1) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.2" x 0.2" (5.0 mm x 5.0 mm) copper pad areas



■ Characteristics (Typical)

FIG1: Io-TL Curve

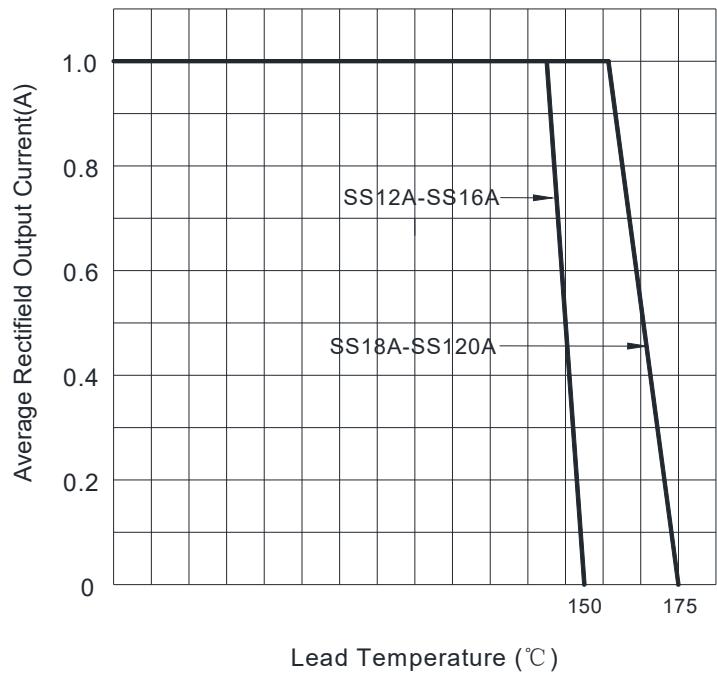


FIG2: Surge Forward Current Capability

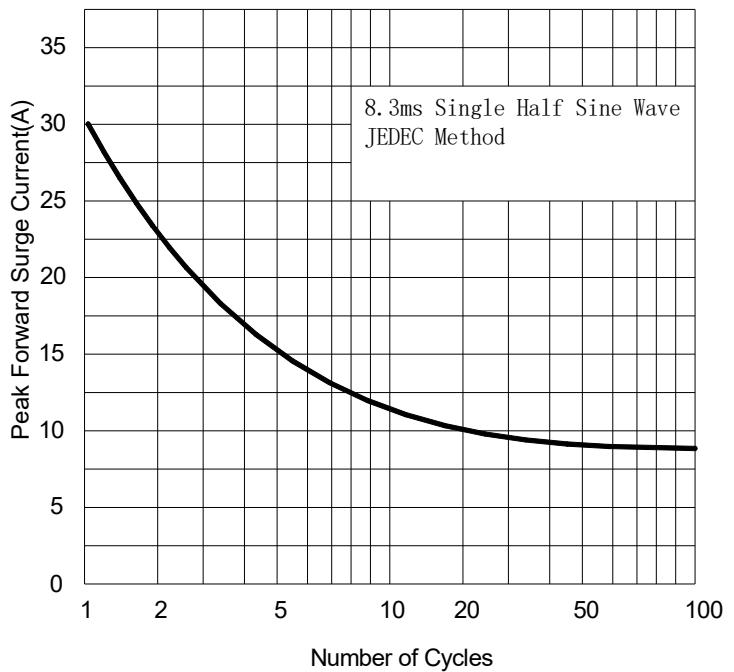


FIG.3: TYPICAL FORWARD CHARACTERISTICS

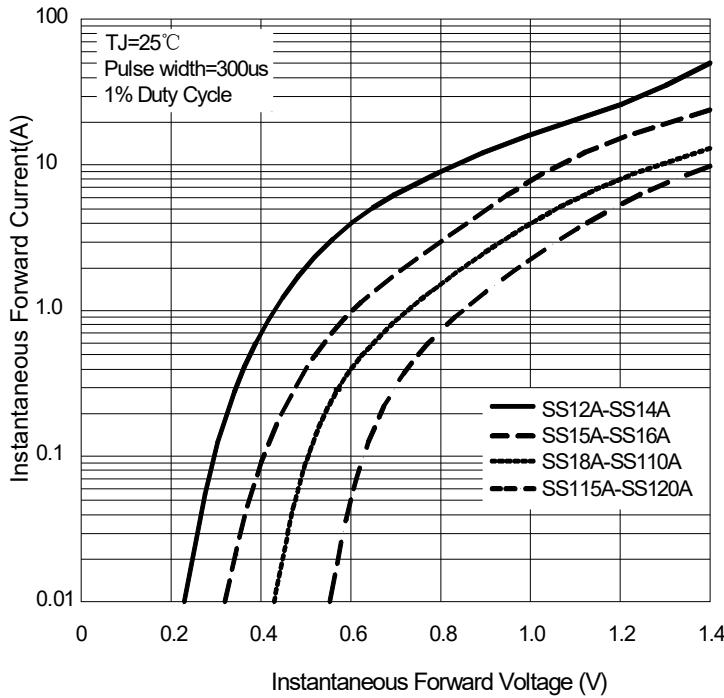


FIG4: Typical Reverse Characteristics

